

community

suburban collection



## finishing touch

Sculptured Rubber Wall Base

An architectural accent, creating the elegant effect of a milled wood base without the expensive installation, indentations, scuffs, and abrasions. Requires no nailing, priming, or painting. Co-extruded thermoplastic rubber is engineered for flexible application to walls, corners, and columns.

## Finishing Touch Sculptured Wall Base



**Cary**  
 Height: 3", 4 1/4"  
 Thickness: 3/8"  
 8' lengths (64 lf per carton)



**Ashburn**  
 Height: 4", 4 1/2"  
 Thickness: 5/16"  
 3": 6' lengths (48 lf per carton)  
 4 1/2": 6' lengths (64 lf per carton)



**Franklin**  
 Height: 4", 4 1/4"  
 Thickness: 1/4"  
 8' lengths (64 lf per carton)



**Yonkers**  
 Height: 6"  
 Thickness: 3/16"  
 4' lengths (32 lf per carton)



**Dearborn**  
 Height: 4", 4 1/4", 6"  
 Thickness: 1/4", 3/8"  
 4", 4 1/4": 8' lengths (48 or 64 lf per carton) \*size dependent  
 6": 4' lengths (32 lf per carton)



**Evanston**  
 Height: 3"  
 Thickness: 5/16"  
 8' lengths (64 lf per carton)



**Slidell**  
 Height: 4 1/4"  
 Thickness: 3/8"  
 8' lengths (64 lf per carton)



**Clayton**  
 Height: 3 1/4"  
 Thickness: 3/8"  
 8' lengths (64 lf per carton)



**Decatur**  
 Height: 4 1/4"  
 Thickness: 3/8"  
 8' lengths (64 lf per carton)



## Finishing Touch Sculptured Wall Base



**Alpine**  
Height: 5 1/4"  
Thickness: 3/8"  
3' lengths (24 lf per carton)



**Tarpon**  
Height: 4 1/4"  
Thickness: 3/8"  
8' lengths (64 lf per carton)



**York**  
Height: 4", 4 1/2", 6"  
Thickness: 3/8", 5/16"  
4", 4 1/4": 8' lengths (48 lf per carton)  
6": 4' lengths (32 lf per carton)



**Preserve**  
Height: 4", 4 1/2"  
Thickness: 5/16"  
8' lengths (64 lf per carton)




**Richmond**  
Height: 4", 4 1/4"  
Thickness: 1/4", 3/8"  
8' lengths (64 lf per carton) \*size dependent



**Quarter Round**  
Height: 1/2"  
Thickness: 1/2"  
20' lengths (240 lf per carton)




**Chair Rail**  
Height: 4"  
Thickness: 1/4"  
5' lengths (60 lf per carton)

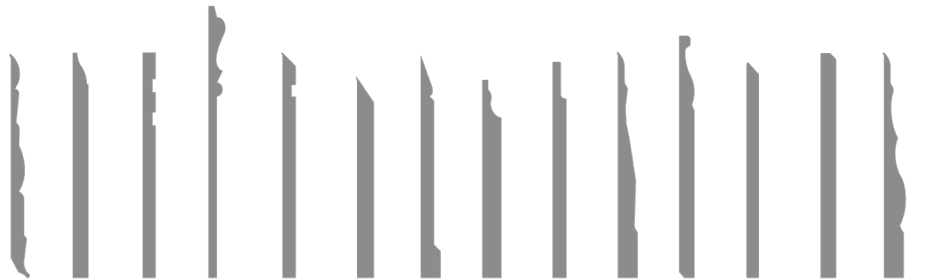


CARY 3", 4 1/4"  
ASHBURN 4", 4 1/4"  
FRANKLIN 4", 4 1/4"  
YONKERS 6"  
DEARBORN 4", 4 1/4", 6"  
EVANSTON 3"  
SLIDELL 4 1/4"  
CLAYTON 3 1/4"  
PRESERVE 4", 4 1/4"  
DECATUR 4 1/4"  
ALPINE 5 1/4"  
RICHMOND 4", 4 1/4"  
YORK 4", 4 1/2", 6"  
TARPON 4 1/4"

## Finishing Touch Sculptured Wall Base Colorways



Almond  
2094



Morning Fog  
2114



Canyon Bluff  
2108



Swirling Smoke  
2005



Black  
2121



Onyx  
2110



Brown  
2100



Straw  
2120



Licorice  
2084



Fossil Gray  
2111



Cream  
2079




Golden Yellow  
2125



Granite Rock  
2092



Baja  
2053




Moss Green  
2083




Poinsettia  
2134




Peanut  
2101




Gray  
2078



Smoke  
2082



Slate Castle  
2119



Stone Gray  
2070



Antique Silver  
2081



Margarita  
2025




Smokehouse Brown  
2113



Magnolia  
2016



Emerald  
2029



Navy  
2130



Azure  
2051



Off White  
2086




Cameo Blue  
2054



Maple Syrup  
2102



Anthracite  
2117



Desert Dune  
2048




Feather Gray  
2118




Butter Pea  
2018



Mountain Pine  
2006




White  
2093



Baroque  
2058



Caramel  
2059



Snow  
2062



## Basics Done Right



---

## Finishing Touch Specifications

Style	Franklin, Chair Rail, Dearborn, Richmond	Yonkers
Construction	Co-extruded Thermoplastic Rubber, Type TP	Co-extruded Thermoplastic Rubber, Type TP
Classification	ASTM F1861 Type TP, Group 1	ASTM F1861 Type TP, Group 1
Finish	Matte	Matte
Total Thickness	1/4" (6.35 mm)	3/16" (4.76 mm)
Profile	Smooth	Smooth
Profile Height	Franklin, Dearborn, Richmond - 4" or 4 1/4" Chair Rail - 4" Dearborn - 6"	6"
Colors	40 (36 are Coordination)	40 (36 are Coordination)
Packaging	See Packaging Chart, p.5	See Packaging Chart, p.5
Adhesive	KL463 Acrylic	KL463 Acrylic

### Testing

---

HUD/FHA	Meets / Exceeds
ADAG (American Disability Act Guidelines)	Passes
Flexibility (ASTM F137)	Passes - 1/4" Mandrel - No Crack/Break
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; $\geq 0.45$ watts/cm <sup>2</sup>
Smoke Density (ASTM E662)	Passes - $< 450$
Chemical Resistance (ASTM F925)	Passes - No More Than Slight Change
Resistance to Heat (ASTM F1514)	Passes - $< 8$ Delta E Color Change
Resistance to Mold/Mildew (ASTM G21/E2180)	Passes - No More Than Slight Change

### Environmental Data

---

Indoor Air Quality	FloorScore Certified
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: IEQc2 - Low Emitting Materials

### Warranty

---

Limited 5-Year Commercial Warranty

## Finishing Touch Specifications

Style	Ashburn, Evanston, Preserve, York	Cary, Dearborn, Slidell, Decatur, Alpine, Richmond, Tarpon*
Construction	Co-extruded Thermoplastic Rubber, Type TP	Co-extruded Thermoplastic Rubber, Type TP
Classification	ASTM F1861 Type TP, Group 1	ASTM F1861 Type TP, Group 1
Finish	Matte	Matte
Total Thickness	5/16" (7.94 mm)	3/8" (9.52 mm)
Profile	Smooth	Smooth
Profile Height	Evanston - 3" Ashburn, Preserve, York - 4" or 4 1/2" York - 6"	Cary - 3" Clayton - 3 1/4" Dearborn, Richmond - 4" Cary, Dearborn, Slidell, Decatur, Tarpon - 4 1/4" Alpine - 5 1/4"
Colors	40 (36 are Coordination)	40 (36 are Coordination)
Packaging	See Packaging Chart, p.5	See Packaging Chart, p.5
Adhesive	KL463 Acrylic	KL463 Acrylic

### Testing

HUD/FHA	Meets / Exceeds
ADAG (American Disability Act Guidelines)	Passes
Flexibility (ASTM F137)	Passes - 1/4" Mandrel - No Crack/Break
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; $\geq 0.45$ watts/cm <sup>2</sup>
Smoke Density (ASTM E662)	Passes - < 450
Chemical Resistance (ASTM F925)	Passes - No More Than Slight Change
Resistance to Heat (ASTM F1514)	Passes - < 8 Delta E Color Change
Resistance to Mold/Mildew (ASTM G21/E2180)	Passes - No More Than Slight Change

### Environmental Data

Indoor Air Quality	FloorScore Certified
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRC5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: IEQc2 - Low Emitting Materials

### Warranty

Limited 5-Year Commercial Warranty

---

## Finishing Touch Specifications

Style	Quarter Round	Pre-mitered Inside and Outside corners also available
Construction	Co-extruded Thermoplastic Rubber, Type TP	Co-extruded Thermoplastic Rubber, Type TP
Classification	ASTM F1861 Type TP, Group 1	ASTM F1861 Type TP, Group 1
Finish	Matte	Matte
Total Thickness	1/2" (12.7 mm)	
Profile	Smooth	Smooth
Colors	40 (36 are Coordination)	40 (36 are Coordination)
Packaging	See Packaging Chart, p.5	See Packaging Chart, p.5
Adhesive	KL463 Acrylic	KL463 Acrylic

---

### Testing

HUD/FHA	Meets / Exceeds
ADAG (American Disability Act Guidelines)	Passes
Flexibility (ASTM F137)	Passes - 1/4" Mandrel - No Crack/Break
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; $\geq 0.45$ watts/cm <sup>2</sup>
Smoke Density (ASTM E662)	Passes - < 450
Chemical Resistance (ASTM F925)	Passes - No More Than Slight Change
Resistance to Heat (ASTM F1514)	Passes - < 8 Delta E Color Change
Resistance to Mold/Mildew (ASTM G21/E2180)	Passes - No More Than Slight Change

---

### Environmental Data

Indoor Air Quality	FloorScore Certified
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: IEQc2 - Low Emitting Materials

---

### Warranty

Limited 5-Year Commercial Warranty



## Finishing Touch Sculptured Wall Base Packaging

Style	Total Thickness	Roll LF Per Carton	Roll Carton Weight	8' Lengths Pcs Per Carton	8' Lengths LF Per Carton	8' Lengths Carton Weight	Inside/Outside Corners Pcs Per Carton	Carton Weight
Cary 3"	3/8"	50 lf (15.24 m)	23 lbs (10.43 kg)	8	64 lf (19.51 m)	33 lbs (14.97 kg)	20	5 lbs (2.268 kg)
Cary 4¼"	3/8"	n/a	n/a	8	64 lf (19.51 m)	51 lbs (23.13 kg)	20	8 lbs (3.629 kg)
Ashburn 4"	5/16"	36 lf (10.97 m)	44 lbs (19.96 kg)	6	48 lf (14.63 m)	59 lbs (26.76 kg)	20	14 lbs (6.35 kg)
Ashburn 4½"	5/16"	36 lf (10.97 m)	44 lbs (19.96 kg)	6	64 lf (19.51 m)	81 lbs (36.74 kg)	20	16 lbs (7.257 kg)
Franklin 4"	1/4"	50 lf (15.24 m)	44 lbs (19.96 kg)	8	64 lf (19.51 m)	57 lbs (25.85 kg)	20	9 lbs (4.082 kg)
Franklin 4¼"	1/4"	50 lf (15.24 m)	45 lbs (20.41 kg)	8	64 lf (19.51 m)	61 lbs (27.67 kg)	20	10 lbs (4.536 kg)
*Chair Rail 4"	1/4"	n/a	n/a	5	60 lf (18.29 m)	46 lbs (20.87 kg)	20	n/a
Yonkers 6"	3/16"	36 lf (10.97 m)	43 lbs (19.5 kg)	4	32 lf (9.754 m)	43 lbs (19.5 kg)	20	18 lbs (8.165 kg)
Dearborn 4"	1/4"	50 lf (15.24 m)	44 lbs (19.96 kg)	8	64 lf (19.51m)	57 lbs (25.85 kg)	20	9 lbs (4.082 kg)
Dearborn 4"	3/8"	n/a	n/a	8	64 lf (19.51 m)	57 lbs (25.85 kg)	20	9 lbs (4.082 kg)
Dearborn 4¼"	1/4"	50 lf (15.24 m)	47 lbs (21.32 kg)	8	64 lf (19.51m)	63 lbs (28.58 kg)	20	10 lbs (4.536 kg)
Dearborn 6"	1/4"	36 lf (10.97 m)	57 lbs (25.85 kg)	4	32 lf (9.754 m)	54 lbs (24.49 kg)	20	24 lbs (10.89 kg)
Evanston 3"	5/16"	50 lf (15.24 m)	38 lbs (17.24 kg)	8	64 lf (19.51m)	52 lbs (23.59kg)	20	9 lbs (4.082 kg)
Slidell 4¼"	3/8"	n/a	n/a	8	64 lf (19.51m)	53 lbs (24.04 kg)	20	9 lbs (4.082 kg)
Clayton 3¼"	3/8"	n/a	n/a	8	64 lf (19.51m)	57 lbs (25.85 kg)	20	9 lbs (4.082 kg)
Preserve 4"	5/16"	36 lf (10.97 m)	43 lbs (19.5 kg)	8	64 lf (19.51m)	77 lbs (34.93 kg)	20	14 lbs (6.35 kg)
Preserve 4½"	5/16"	36 lf (10.97 m)	44 lbs (19.96 kg)	8	64 lf (19.51m)	81 lbs (36.74 kg)	20	16 lbs (7.257 kg)
Decatur 4¼"	3/8"	n/a	n/a	8	64 lf (19.51m)	53 lbs (24.04 kg)	20	9 lbs (4.082 kg)
*Qtr Round ½"	1/2"	n/a	n/a	20	240 lf (73.15 m)	35 lbs (15.88 kg)	n/a	n/a
Alpine 5/4"	3/8"	n/a	n/a	3	24 lf (7.315 m)	42 lbs (19.05 kg)	20	21 lbs (9.525 kg)
Richmond 4"	1/4"	50 lf (15.24 m)	44 lbs (19.96 kg)	8	64 lf (19.51m)	57 lbs (25.85 kg)	20	9 lbs (4.082 kg)
Richmond 4"	3/8"	n/a	n/a	8	64 lf (19.51m)	57 lbs (25.85 kg)	20	9 lbs (4.082 kg)
Richmond 4¼"	1/4"	50 lf (15.24 m)	45 lbs (20.41 kg)	8	64 lf (19.51m)	61 lbs (27.67 kg)	20	10 lbs (4.536 kg)
Richmond 4¼"	3/8"	n/a	n/a	8	64 lf (19.51m)	61 lbs (27.67 kg)	20	10 lbs (4.536 kg)
York 4"	5/16"	36 lf (10.97 m)	44 lbs (19.96 kg)	6	48 lf (14.63 m)	60 lbs (27.22 kg)	20	16 lbs (7.257 kg)
York 4½"	5/16"	36 lf (10.97 m)	45 lbs (20.41 kg)	6	48 lf (14.63 m)	63 lbs (28.58 kg)	20	11 lbs (4.99 kg)
York 6"	5/16"	36 lf (10.97 m)	57 lbs (25.85 kg)	4	32 lf (9.754 m)	54 lbs (24.49 kg)	20	24 lbs (10.89 kg)
York 4¼"	3/8"	n/a	n/a	8	64 lf (19.51m)	53 lbs (24.04 kg)	20	9 lbs (4.082kg)

\* Indicates Ships in 12' Lengths